

**Verschluss von ungenutzten GST-Buchsen zur Stromweiterleitung**

Nach DIN VDE 0620-1 und DIN VDE 0620-2-1 dürfen aktive, stromführende Teile von Produkten, die Steckdoseneinsätze mit einem Shutter (erhöhtem Berührungsschutz) besitzen, mit einer Lehre (1 mm Draht-Stift) nicht erreicht werden. Diese Anforderung bezieht sich nicht nur auf die Steckdoseneinsätze, sondern auf das gesamte Produkt.

Für den normgerechten Betrieb der Steckdosenleiste WSDL muss eine ungenutzte GST-Buchse zur Stromweiterleitung verschlossen werden. Der Verschluss darf nicht werkzeuglos entfernbar sein.

Artikelnummern für Steckdosenleiste WSDLs

Bezeichnung	Artikelnummer
Steckdosenleiste WSDL 1-3 SW	99.652.0028.0
Steckdosenleiste WSDL 1-3 WS	99.653.0028.0
Steckdosenleiste WSDL 1-3 SW VPE 5	99.654.0028.0
Steckdosenleiste WSDL 1-3 WS VPE 5	99.655.0028.0


Cover cap of unused GST female connectors for power transmission

For products that have socket outlets with a shutter (increased contact protection), no active, current-carrying parts of the product may be reached with a gauge (1 mm wire pin) according to DIN VDE 0620-1 and DIN VDE 0620-2-1. This requirement applies not only to the socket outlets, but to the entire product.

For the standardized operation of the multiple socket outlet WSDL, an unused GST female connector for power transmission must be closed. The cover cap must not be removable without tools.


Ordering numbers for multiple socket outlet WSDL

Name	Ordering number
Multiple socket outlet WSDL WSDL 1-3 SW	99.652.0028.0
Multiple socket outlet WSDL WSDL 1-3 WS	99.653.0028.0
Multiple socket outlet WSDL WSDL 1-3 SW VPE 5	99.654.0028.0
Multiple socket outlet WSDL WSDL 1-3 WS VPE 5	99.655.0028.0

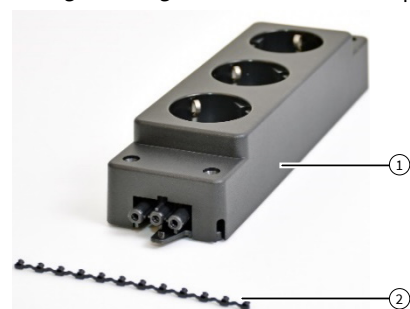
Montageanleitung Verschluss GST18-Buchse | Assembly instructions closure GST18 female

1	Steckdosenleiste WSDL	Multiple socket outlet WSDL
2	Verschlussstück für GST18-Buchse	Cover cap for GST18 female connector

1. Den Verschluss in passender Länge direkt hinter dem letzten Stift abschneiden.
Cut off a suitable length from the cover cap right behind the last pin.

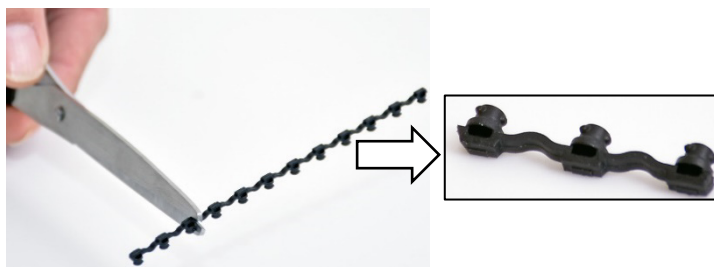

2. Den Verschluss in Buchse stecken. Der Verschluss muss mit einem hörbaren Klicken einrasten.
Push the cover cap into the female connector. Fix it in place with an audible click.

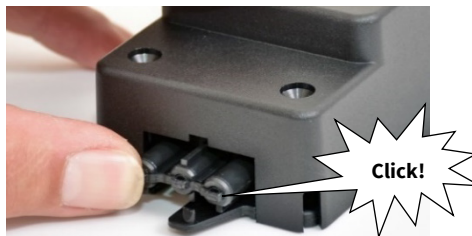

- Der Verschluss ist fertig montiert.
The cover cap is installed.

